
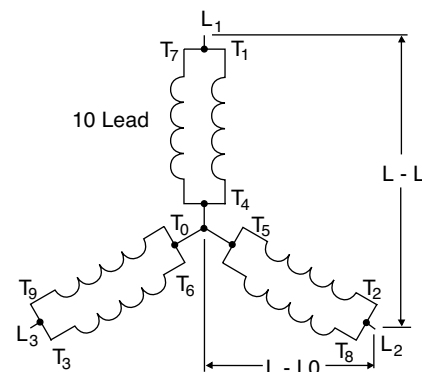




SERIES HIGH WYE

Voltage		
HZ	L-L	L-L0
60	380	219
	416	240
	440	254
	460	266
	480	277
50	380	219
	400	231
	415	240
	440	254

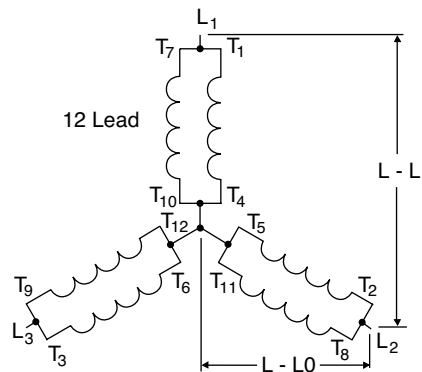

PARALLEL LOW WYE

Voltage		
HZ	L-L	L-L0
60	190	110
	208	120
	220	127
	230	133
	240	139
50	190	110
	200	115
	208	120
	220	127

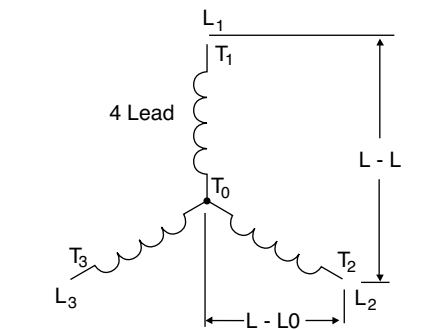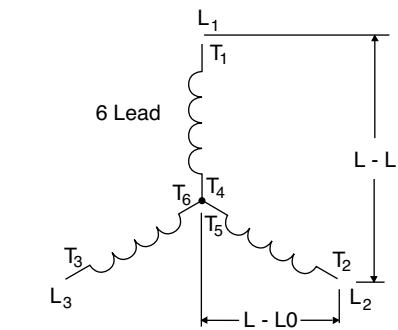


WYE

Voltage		
HZ	L-L	L-L0
60	380	219
	480	277
	600	346
	2400	1386
	3300	1905
	4160	2402
	6600	3811
	13800	7967
50	380	219
	400	231
	415	240
	3300	1905
	11000	6351


SERIES HIGH DELTA

Voltage		
HZ	L-L	L-L0
60	240	120
	277	139
50	200	100
	220	110
	240	120

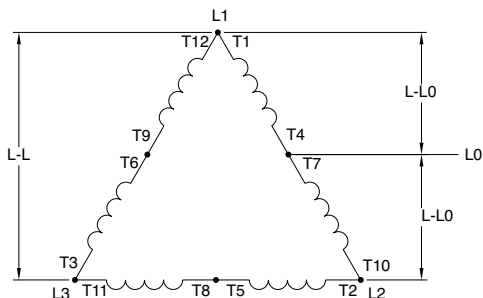

PARALLEL LOW DELTA

Voltage	
HZ	L-L
60	110
	120
50	100
	110

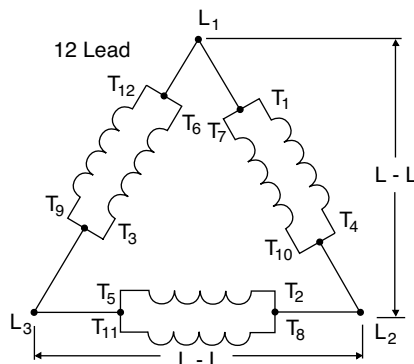


Technical Data

Connection Diagrams

DELTA


Voltage	
HZ	L-L
60	2402
	7967
50	1905
	6351

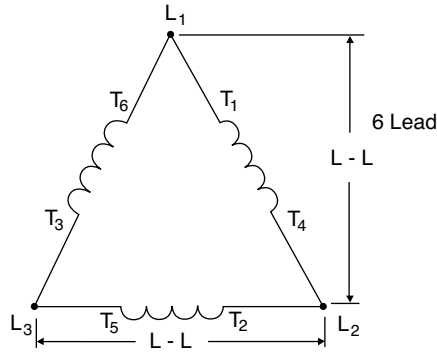

DOUBLE DELTA

Single Phase Connection ①


Voltage		
HZ	L-L	L-LO
60	200	100
	220	110
	240	120
50	220	110

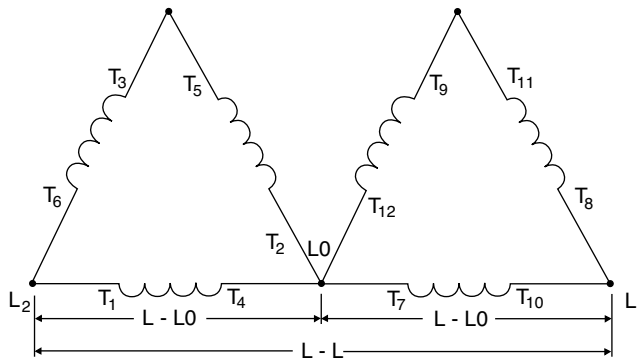

PARALLEL LOW ZIGZAG

Single Phase Connection ①


Voltage		
HZ	L-L	L-LO
60	200	100
	220	110
	240	120
50	220	110

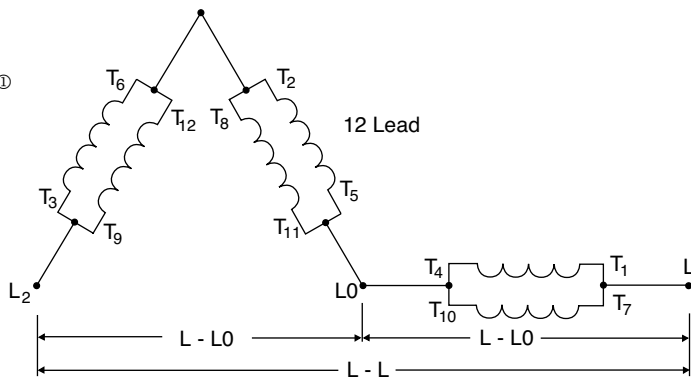

SERIES HIGH ZIGZAG

Single Phase Connection ①

Voltage		
HZ	L-L	L-LO
60	480	240
50	440	220

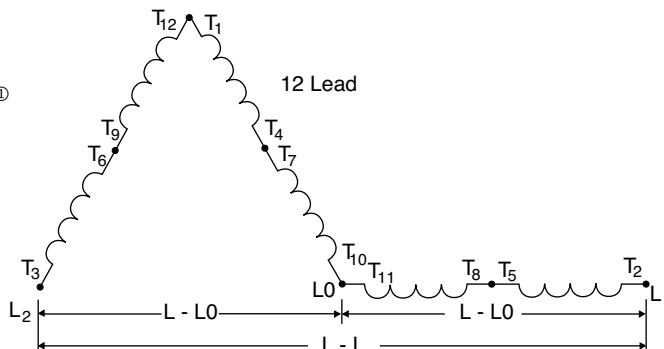

① Single phase kW/kVA ratings are approximately equal to 50% of the generator's three phase ratings.

DEDICATED SINGLE PHASE CONNECTIONS

4 LEAD, SERIES CONNECTION - HIGH VOLTAGE			
	VOLTAGE		
		L-L	L-N
	60 HZ	240	120

4 LEAD, PARALLEL CONNECTION - LOW VOLTAGE		
	VOLTAGE	
		L-L
	60 HZ	120