


marathon™

Motors

TEFC Fire Pump Motors SB565

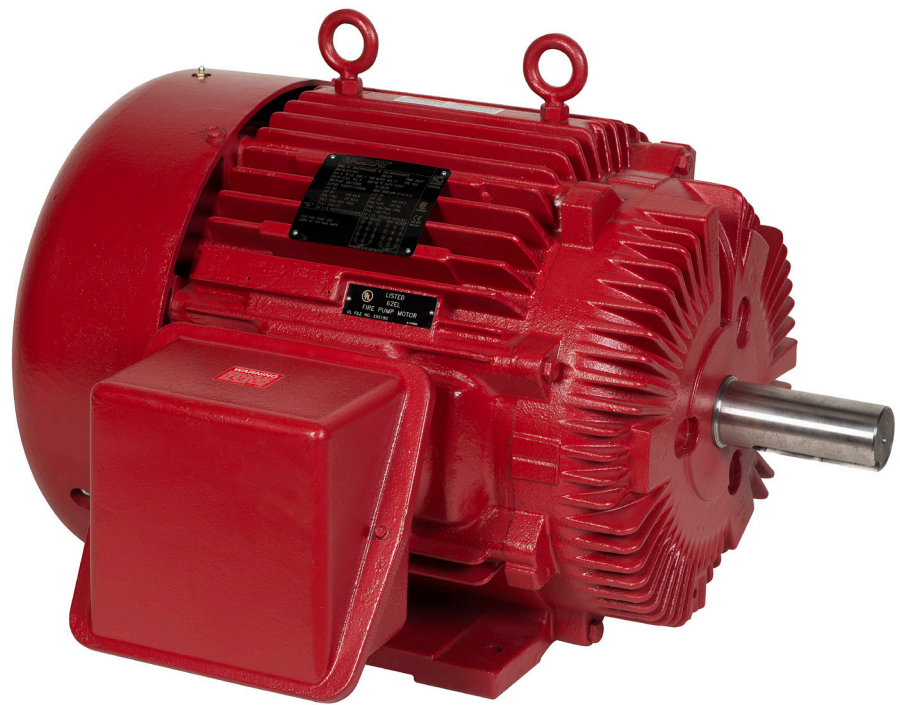

A Regal Brand

REGAL

TEFC Fire Pump Motors

Marathon Motors has been a worldwide leader in providing High Quality motors since 1913. Our wide range of UL Listed Fire pump drip-proof product has been expanded to include a totally enclosed fan cooled (TEFC) offering. The features of the TEFC fire pump motor included; horsepower range of 3 to 450* HP, 2 and 4 pole capabilities, cast iron construction, ball bearings, red paint and 60/50 Hz ratings. Marathon Motors fire pump motors meet NFPA 20 Standards and are fully compliant with federal motor efficiency requirements as described in the Energy Independence and Security Act of 2007 also known as EISA.

Features:

- 3 to 450* Hp
- 2 and 4 pole
- Cast Iron Construction
- UL File EX5190, CSA File LR2025
- Ball Bearings
- 1.15 Service Factor - 40°C Ambient
- Red paint Standard
- NEMA design B, Code G or less
- EPA Efficiency
- Dual voltage motors have 12 leads, suitable for wye-delta or across the line start on either voltage or part winding start on low voltage
- Single voltage motors have 12 leads and are suitable for wye-delta, across the line or part winding start
- Leads may vary based on design
- Designs are available with C-face, D-flange or P-base mounting
- Various custom "Voltage-Hertz" combinations are available

Available Frame Sizes – NEMA

180T

210T

250T

280T/TS

320T/TS

360T/TS

405T/TS

440T/TS

5000

* 400 Hp, 2 pole models are 5000 frame and 300 - 450 Hp, 4 pole models are 5000 frame



marathon®
Motors



100 E. Randolph Street, PO Box 8003
Wausau, WI 54401-8003
PH: 715-675-3311

www.marathonelectric.com

A Regal Brand

REGAL

www.regalbeloit.com